

Data sheet

**Keystone 19 inch module frame 1RU 24 port
light gray unequipped, unshielded**

Page 1/5


P/N

130A20-00-E


EAN 4250184106654

2018-20-02

Illustrations

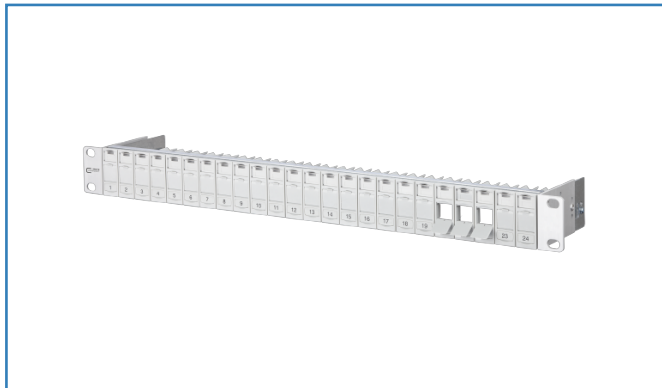

Dimensional drawing

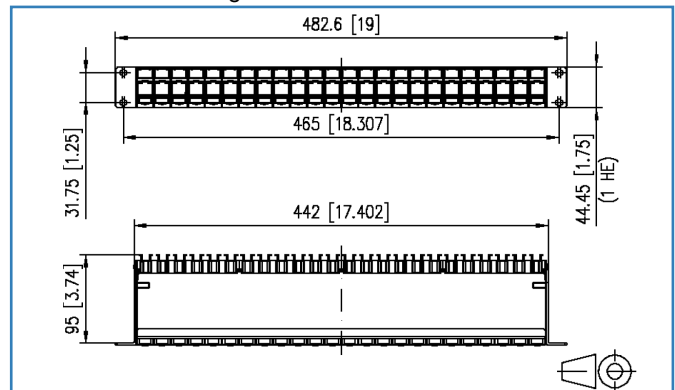

See enlarged drawings at the end of document



Product specification

- 19 inch 1RU module frame for 24 individual modules; Keystone design
- module frame front made of silver anodized aluminum
- plastic module support with dust protection covers (other colors available as accessory); detachable to the front
- integrated cable support with optional strain relief
- label window for enclosed identification labels
- label sheet 210 x 297 mm see accessory
- grounding bolt M6 x 10 with nut and lock washer



Data sheet

Page 2/5

Keystone 19 inch module frame 1RU 24 port light gray unequipped, unshielded

P/N

130A20-00-E

EAN 4250184106654

2018-20-02

Technical Data

General Data

Fields of application	Office
Design	patch panel
Shielding	unshielded
Color	light gray
Dimensions	
Dimension (L x W x H)	95.00 x 482.60 x 44.50 mm
Dimension (L x W x H)	3.74 x 19.00 x 1.752 in.
Inches	19 inches
Height unit	1RU
Labeling option	label window with identification label + printed numbers

Connections/interfaces

Number of ports interface 1	24
Number of equipped ports interface 1	0
Number of ports interface 2	24
Number of ports interface 2 equipped	0
Ground connection	grounding bolt M6x10 with nut and lock washer

Mechanical characteristics

Cut-out	Keystone
strain relief	yes

Materials and material properties

Material - Subrack	Al (Aluminium)
Material - Subrack finish	silver anodized
Material - Module support	ABS
Material - Cable guide	ABS
Material - Dust protection	ABS
Material - Label window	ABS, transparent



Data sheet

Page 3/5

Keystone 19 inch module frame 1RU 24 port light gray unequipped, unshielded

P/N

130A20-00-E

EAN 4250184106654

2018-20-02

Technical Data

Environmental conditions

Temperature (min. - max.)

Temperature - Storage °C	-40 - 70 °C
Temperature - Storage °F	-40 - 158 °F
Temperature - Operating °C	-40 - 70 °C
Temperature - Operating °F	-40 - 158 °F

Approvals

RoHS compliant

UL listed (file no.)



Classifications

ETIM 5.0	EC001128
ETIM 6.0	EC001128

Packing details

Type of packaging	1 pc(s) / box
Packaging unit - Weight (gram)	563.00 g
Packaging unit - Weight (pound)	1.24 lb
Packaging dimension (W x H x D)	520.00 x 180.00 x 46.00 mm
Packaging dimension (W x H x D)	20.472 x 7.087 x 1.811 in.



Data sheet

Page 4/5

**Keystone 19 inch module frame 1RU 24 port
light gray unequipped, unshielded**

P/N

130A20-00-E

EAN 4250184106654

2018-20-02

Accessories

P/N	Designation
130792	Mounting kit, cage nuts M6
816979-0105-I	Dust protection covers for Modul patch panels subway / REG yellow
816979-0106-I	Dust protection covers for Modul patch panels subway / REG blue
816979-0107-I	Dust protection covers for Modul patch panels subway / REG green
816979-0108-I	Dust protection covers for Modul patch panels subway / REG red



Data sheet

Page 5/5

**Keystone 19 inch module frame 1RU 24 port
light gray unequipped, unshielded**

P/N

130A20-00-E

EAN 4250184106654

2018-20-02

Illustrations

Dimensional drawing

