

Data sheet**OpDAT ADT for 4xSC/2xLC-D CSH, unequipped**

Page 1/3

P/N


1501100000HC

EAN 4251394639178

2020/10/01

Illustrations

Dimensional drawing

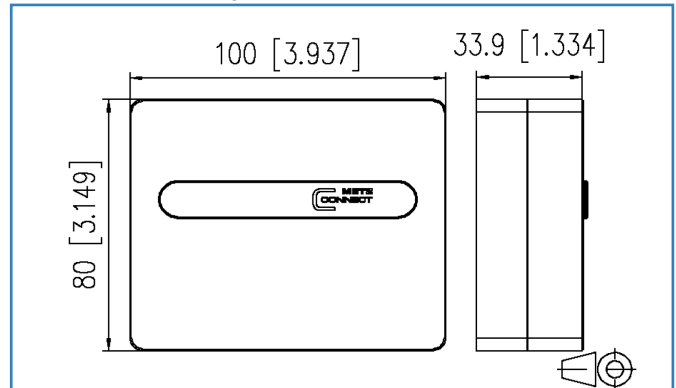

See enlarged drawings at the end of document

Product specification

- Compact, universal fiber optic termination unit for flush mounted outlets or cavity wall boxes, surface mounting or rail mounting
- To connect pre-terminated installation cables with mini breakout cables or to mount pigtailed
- Equipped with 3 blind plugs
- Possible cable entries: on the back, from above, from below, from the left or the right side
- With integrated clips for rail mounting in two directions
- Pivoting, removable splice tray for up to 8 shrink splice protections
- Cover removable without tool
- Plug direction 90°
- Color of the cover parts pure white RAL 9010



OpDAT ADT for 4xSC/2xLC-D CSH, unequipped

P/N

1501100000HC

EAN 4251394639178

2020/10/01

Technical Data

General Data

Design	wall outlet
Mounting style	surface mount, standard rail TH35
Color	Pure white RAL 9010
Dimensions	
Dimension (L x W x H)	80 mm x 100 mm x 35 mm
Dimension (L x W x H)	3.15 in. x 3.937 in. x 1.378 in.

Connections/interfaces

Number of ports interface 1	4
Number of ports interface 2	4
Number of equipped ports interface 1	0
Number of ports interface 2 equipped	0
Module plug-in direction	straight

Mechanical data

Cut-out	SC
---------	----

Materials and material properties

Material - Housing	ABS + PC
RoHS	compliant

Environmental conditions

Temperature (min. - max.)	
Temperature - Storage °C	-10 °C - 60 °C
Temperature - Storage °F	14 °F - 140 °F
Temperature - Operating °C	-10 °C - 60 °C
Temperature - Operating °F	14 °F - 140 °F
Particulate ingress	IP2X
Liquid ingress/immersion	IPX0

Classifications

ETIM 7.0	EC000058
----------	----------



Illustrations

Dimensional drawing

